

- Remove the soundproofing panel
- Move the front seat to the rearmost position
- Turn the clips a 1/4 turn.

Hint:

Use a washer or a coin.


- Slide the panel backwards
- Remove the panel.

- Unsnap the nozzle.

Install:

In reverse order.

Replacing the rear ashtray

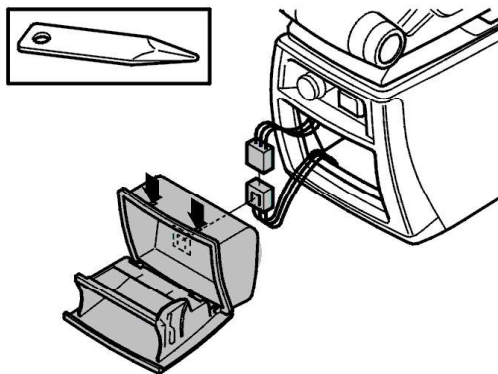


- Open the ashtray so that it passes the hooks
- Release the ashtray by pressing the top edge
- Press down slightly
- Release the catches on the side
- Pull the holder backwards
- Remove the connector.

Install:

In reverse order.

Replacing the centre ashtray

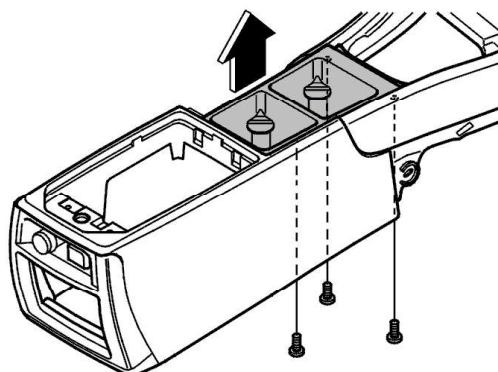

- Remove the three screws
- Release the ashtray by pressing the top edge.